


Hammond Watertight , Heavy Duty Thick Wall Diecast Aluminium - 1590Z


Rugged, diecast aluminium alloy . Tough yet easy to machine. Meets IP65.

- Lap joint construction with a one piece silicone rubber gasket provides protection against access of dust & water. Designed to meet IP65.
- Painted version is painted inside and out with tough polyester powder paint for lasting finish.(RAL7001)
- Assembled with stainless steel machine screws and 'O' rings.
- Galvanized steel inner panels available.
- Internal mounting shelf on some models.
- UL and CUL listed certified to NEMA 4X standards (UL508) - File #E65324.
- Easy to wall mount using through box-blind hole on structure outside the gasket.
- For non metallic versions see1590ZGRP.


Natural aluminium with a smooth brushed finish.

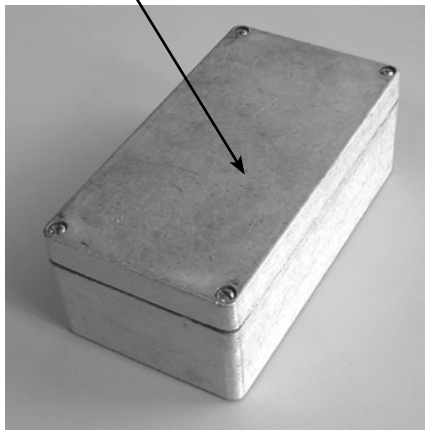

Moulded one piece silicon rubber gasket mounts into cast lid groove, compressed by box tongue.

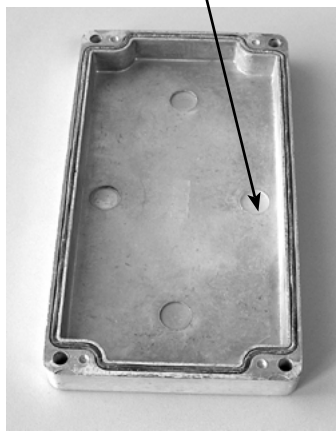

Easy wall mounting using recessed hole outside of gasket protection.

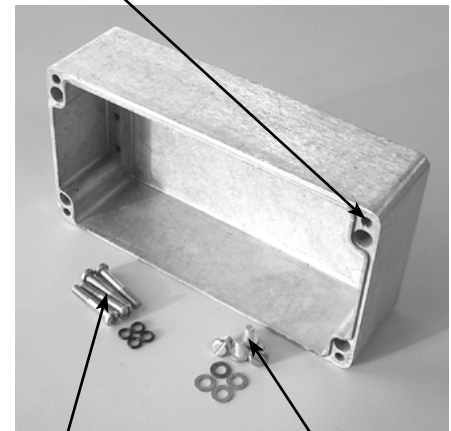

For detailed drawings and CAD files visit www.hammondmfg.com

Stainless steel machine screws into tapped holes with individual neoprene 'O' rings.

Copper ground screws & washers.

Part Number			Length	Width	Height (no lid)	Height (With Lid)
Unpainted	Black	Grey				
26-1590Z060	26-1590Z060BK	26-1590Z060GY	50	45	24	30
26-1590Z061	26-1590Z061BK	26-1590Z061GY	64	58	26	36
26-1590Z100	26-1590Z100BK	26-1590Z100GY	76	80	40	52
26-1590Z110	26-1590Z110BK	26-1590Z110GY	76	80	40	52
26-1590Z062	26-1590Z062BK	26-1590Z062GY	98	64	26	36
26-1590Z119	26-1590Z119BK	26-1590Z119GY	122	120	60	80
26-1590Z120	26-1590Z120BK	26-1590Z120GY	125	80	45	60.5
26-1590Z063	26-1590Z063BK	26-1590Z063GY	150	64	26	36
26-1590Z160	26-1590Z160BK	26-1590Z160GY	160	160	70	90
26-1590Z130	26-1590Z130BK	26-1590Z130GY	176	80	42	54
26-1590Z135	26-1590Z135BK	26-1590Z135GY	176	80	42	62
26-1590Z231	26-1590Z231BK	26-1590Z231GY	200	230	92	112
26-1590Z150	26-1590Z150BK	26-1590Z150GY	221	121	60	80
26-1590Z140	26-1590Z140BK	26-1590Z140GY	250	80	40	55
26-1590Z162	26-1590Z162BK	26-1590Z162GY	260	159	70	90
26-1590Z235	26-1590Z235BK	26-1590Z235GY	335	235	111	131
26-1590Z166	26-1590Z166BK	26-1590Z166GY	360	160	70	90
26-1590Z164	26-1590Z164BK	26-1590Z164GY	361	120	81	101