

## PCB Headers with Latches



2.54mm pitch

- Quality Brass Gold Plated Contacts.
- Housing PBT 30% Glass (UL94VO.)
- Current Rating: 1A
- Dielectric Strength: 500VAC for 1 min.
- Operating Temp. -55°C to +105°C.



Part No. 32-119 xx S or R      S = Straight  
 xx = No of Contacts              R = Right Angle

Position	A	B	C	D
10	10.16	17.96	21.84	32.00
12	12.70	20.50	24.38	34.54
14	15.24	23.04	26.92	37.08
16	17.78	25.58	29.46	39.62
20	22.86	30.66	34.54	44.70
24	27.94	35.74	39.62	49.78
26	30.48	38.28	42.16	52.32
30	35.56	43.36	47.24	57.40
34	40.64	48.44	52.32	62.48
40	48.26	56.00	60.48	70.10
50	60.96	68.76	72.64	82.80
60	73.66	81.46	85.34	95.50
64	78.74	86.54	90.42	100.58

### Straight

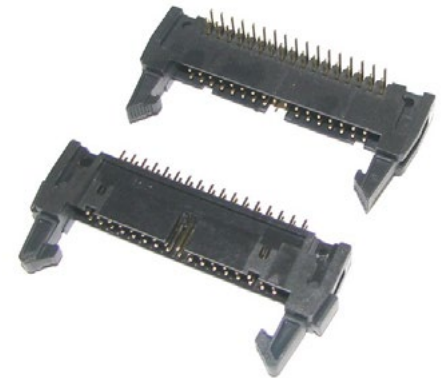

### Right Angle



## IDC Socket with Strain Relief

2.54mm pitch





- Contacts: Gold Plated Phosphor Bronze.
- Housing PBT 30% Glass (UL94VO.)
- Contact Resistance: 30mΩ max at 100mA DC.
- Current Rating: 1A
- Operating Temp: -55°C to +105°C.

Part No. 32-110 xx              xx = No of Contacts



### Dimensions

Position	A	B
10	17.27	10.16
14	22.40	15.24
16	24.94	17.78
20	30.00	22.86
24	35.10	27.94
26	37.59	30.48
30	42.66	35.56
34	47.80	40.64
40	55.37	48.26
50	68.18	60.96
60	80.80	73.66
64	85.90	78.74



### Strain Relief